




85hp - 95hp | MF 4700

Massey Ferguson has always provided innovative and practical equipment to meet the challenges of the modern farmer. The MF 4700 Global Series continues this tradition by offering a highly modern, high performance, heavy-duty, straightforward range of tractors that provide exceptional efficiency for every type of farmer all over the world.

With its straightforward design, manufactured in state-of-the-art factories across the globe, efficient drivelines and high level of comfort, the MF 4700 is designed to deliver exceptional value for money to any sector.

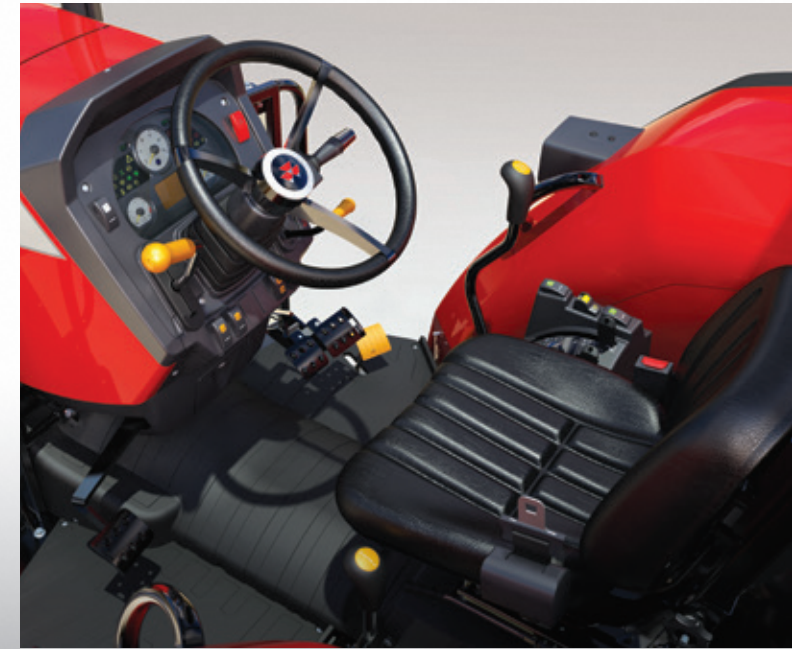

FROM MASSEY FERGUSON

Specifications

	Platform version		Cab version	
	MF 4708	MF 4709	MF 4708	MF 4709
Engine Performance				
Max hp (kW) power @ 2,000rpm	85 (62.5)	95 (70.8)	85 (62.5)	95 (70.8)
Max torque @ 1,500rpm	347	355	347	355
Engine				
Type/Capacity/no. of Cylinders	AGCO POWER 3.3 litre, 3 cylinders			
Technology	Electronic injection, Common rail, 4 valves/cylinder, DOC + SCR			
Transmission				
Type/ No. of gears	Fully synchronised - 12 x 12			
Gears/Ranges	6 x 2			
Shuttle	Mechanical synchronised			
Optional Shuttle	Power Shuttle and Comfort Control			
Min Speed @ 1,400rpm	1.91			
Optional creeper gears	24 x 24			
Min Speed @ 1,400rpm* with creeper	0.14			
Power Take-off				
Operation and control	Independent/Electro hydraulic control			
PTO speed @ engine rpm	540 & 1000		2,000	
PTO speed @ engine rpm	540 Eco		1,550	
PTO shaft				
Standard	6 splines			
Optional	6 & 21 splines			
Hydraulics				
Auxiliary oil flow	litres/min 65 litres/min supplying spoolvalves and linkage			
Max pressure	Bar 200			
Rear linkage				
Maximum lift capacity	kg 3,000			
Lower links	Hook ends (cat 2)			
Brakes				
Type	Hydraulic / Oil cooled			
Rear tyres				
Standard	460/85 R30	460/85 R30 (4WD) 420/85 R34 (2WD)	420/85 R34	
Optional	Depends on model 340/85 R38 - 480/70 R34 - 540/65 R34			
Capacities				
Fuel tank capacity	litres 105		120	
AdBlue® tank capacity	litres 10		15	
Weight				
2WD**	kg 2,900		3,700	
4WD**	kg 3,100		3,900	

- Not applicable/available  ISO TR14396

* Manufacturer's testing

** Depends on options

For even greater productivity a range of optional equipment is available.

For full details please contact your local Massey Ferguson dealer.

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.

MF 4700

- Platform and cab version, 85hp to 95hp
- AGCO Power 3.3 litre, 3 cylinder engines, Stage IV Final compliant with maintenance-free DOC and All-in-One SCR Technology
- Modern and efficient transmission: all new 12x12 synchronised transmission with two ranges
- Straightforward, practical design provides an easy-to-operate tractor in an excellent, modern working environment

Key features

- Up to 65 litres/min hydraulic pump flow
- 3t lift capacity rear linkage with optional Electronic Linkage Control
- 2 spool valves as standard
- Choice of PTO options: 540/540E/1,000
- Easy access cab or spacious platform

Weight & Dimensions	
Platform	
	MF 4708/MF 4709
	Four-wheel drive
Overall length from front weight frame to rear linkage arms - mm	4,067
Wheelbase - mm	2,250
Turning circle - external diameter, less brakes - m	7.7
Height to top of canopy	2,594
Width (min / max) - mm	1,820 to 2,110
Maximum ground clearance - mm	460
Cab	
	MF 4708/MF 4709
	Four-wheel drive
Overall length from front weight frame to rear linkage arms - mm	4,067
Wheelbase - mm	2,250
Turning circle - external diameter, less brakes - m	7.7
Height to top of Standard roof, with 16.9 R 34 tyres	2,550
Height to top of Visio roof, with 16.9 R 34 tyres	2,550
Width (min / max) - mm	1,820 to 2,110
Maximum ground clearance - mm	460